
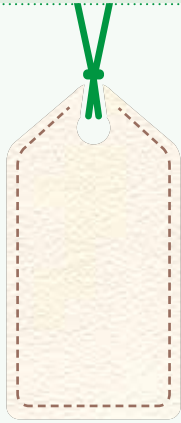


# DATA SHEET






TESTED FOR	RESULT	CONFIRM TO DIN
Lightfastness:	4+	54004
Possible color change:	gets lighter	
<b>Abrasion values:</b>	<b>Level:</b>	
Dry	5	53339
Wet	5	
Perspiration	5	
Permanent folding behavior: 20.000 bucklings	passed	53340
Tensile strength: 20 N/mm	passed	53329
Burning behavior: y EN1021 part I u. II	passed	
Detaillied information about light fastness, abrasion values, skin tollernace and burning behaviour can be found at: <a href="http://www.vegetable-tanned-leather.com/data-and-facts.html">www.vegetable-tanned-leather.com/data-and-facts.html</a>		
<b>Tested for</b> Heavy metals, PAK (Conducted by the German Institute of Environment in Bremen, 2013)		

**BELUGAWEISS 360**



Color: Belugaweiss 360  
Collection: Nappa  
Thickness: 1,4 - 1,6 mm



\* Valid only for skins from eco farming  
(Please ask for availability)