
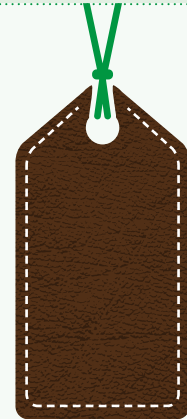


DATA SHEET



TESTED FOR	RESULT	CONFIRM TO DIN
Lightfastness:	4-	54004
Possible color change:		
Abrasion values:	Level:	
Dry	3 - 4	53339
Wet	2 - 3	
Perspiration	2	
Permanent folding behavior: 20.000 bucklings	passed	53340
Tensile strength: 20 N/mm	passed	53329
Burning behavior: EN1021 part I u. II	passed	

GRIZZLY 848



Color: Grizzly 848
Collection: Rodeo SOFT
Thickness: 1,4 - 1,6 mm

Detailed information about light fastness, abrasion values, skin tolerance and burning behaviour can be found at:
www.vegetable-tanned-leather.com/data-and-facts.html