



DATA SHEET

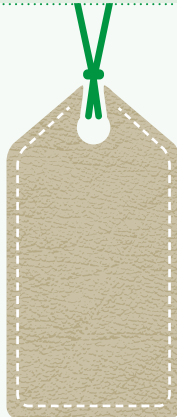

TESTED FOR	RESULT	CONFIRM TO DIN	WALNUT 166
Lightfastness:	3	54004	 <p>Color: Walnut 166 Collection: Rodeo SOFT Thickness: 1,4 - 1,6 mm</p>
Possible color change:			
Abrasion values:	Level:		
Dry	4 - 5	53339	
Wet	4		
Perspiration	3 - 4		
Permanent folding behavior: 20.000 bucklings	passed	53340	
Tensile strength: 20 N/mm	passed	53329	
Burning behavior: EN1021 part I u. II	passed		
Detailed information about light fastness, abrasion values, skin tolerance and burning behaviour can be found at: www.vegetable-tanned-leather.com/data-and-facts.html			